

Expro Excellence Customer resolves metering uncertainty with Expro ActiveSONAR™

Acumen



Insight

Objectives and background


- An operator of an offshore field with subsea wells tied back to a FPSO was measuring bulk flow rates for a liquid transfer line using daily single point stock tank values
- The customer was experiencing issues reconciling the stock tank to the export line readings
- The customer retrofitted a Vortex meter to the transfer line to provide real-time volumetric measurements to help reconcile the difference between the stock tank and the export readings
- The Vortex meter readings did not match either the stock tank or the export line
- Both partner and regulatory reporting requirements meant the customer had to resolve their metering uncertainty
- The customer approached Expro to provide a reliable solution

Expro Excellence

- Expro proposed using an ActiveSONAR clamp on flow meter to monitor, validate and/or eliminate errors in the existing metering system
- The ActiveSONAR was installed without any modification to the piping
- Initially, the Vortex meter was bypassed and the ActiveSONAR was compared to stock tank readings, which were in agreement
- The Vortex meter was then compared to the ActiveSONAR, which allowed the ActiveSONAR to determine any process issues

Value to the client

- Expro ActiveSONARTM diagnostic data indicated two different flow characters in the pipe, periods of stable flow and of instability
- The Vortex meter showed significant variability in reported flow rates when compared to stable rates reported by ActiveSONAR
- The ActiveSONAR flow rate was within a few percent of stock tank measurements
- Expro was able to highlight the process issues causing the error in the Vortex meter
- The customer resolved the metering issue and was able to report accurate measurements meeting the regulatory requirements

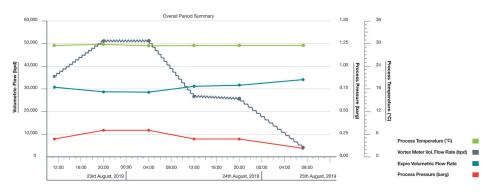

Contact

For further information please contact: acumen@exprogroup.com or visit exprogroup.com/acumen

© Expro International Group LTD | Date 03/2021 | Revision 2.0