


Well Construction

Frank's Tubular Running Service (TRS) - Completions Technologies

500-ton Hydraulic Control Line Spider (HCLS500)

Features and benefits

- EXTENDED RANGE™ capabilities allow tool to run tapered tubing strings with only minor adjustments and without changing slips
- Equipped with Expro's unique spider/elevator Interlock system, which ensures the spider/elevator is properly set on the pipe before the companion tool is allowed to open
- Up to a 16 3/4-inch pass through diameter that provides the ability to pass large OD control line or umbilical clamps through the tool body
- The foot pedal operated rotating control line guard ensures that the control lines are secured into the protective sleeve before the slips are allowed to close
- Able to accept up to a 4-inch umbilical
- 50,000 pounds slip set force ensures a positive grip on hard chrome pipe and prevents slippage
- Top cover rated to 100 tons

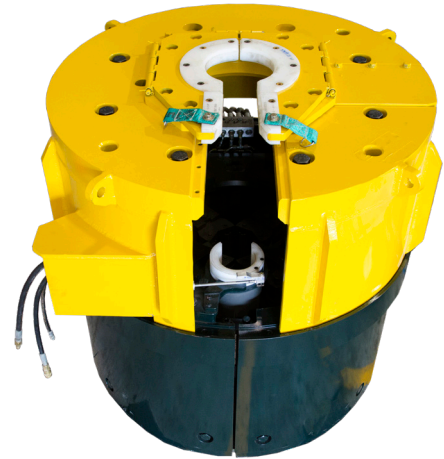

Specifications

Size range (in.)	3 1/2 - 9 5/8
Capacity (tons / tonnes)	500 (454)
Rotary size (in./mm)	49 1/2 (1,156)
Max. width (in./mm)	62 (1,575)
Height (in./mm)	53 1/2 (1,359)
Height (above floor) (in./mm)	23 5/8 (600)
Weight (lbs/kg)	13,800 (6,260)
Operation type	Hydraulic